


SPRINKLER PRESSURE GAUGES

DESCRIPTION: Senju Sprinkler Gauges are designed for use on wet or dry sprinkler systems. These 3.5" gauges are approved by Factory Mutual System and are listed by UL

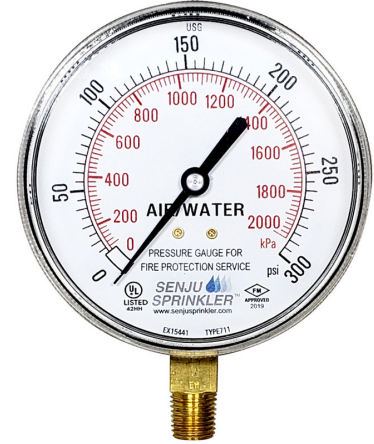

APPROVALS: UL Listed
FM Approved

SPECIFICATIONS:

Size:

3.5" (97.8mm)

Accuracy:

± 3-2-3% (Grade B)

Ranges:

0-300 psi, air/water

0-80 psi, retarded to 250 psi, air

Bourdon Tube:

Copper Alloy, C-type

Connection:

Copper Alloy, 1/4" NPT Lower Mount (LM)

Window:

High Impact Resistance Polycarbonate
one-piece ring and crystal

Dial:

Aluminum, white background with
black and red lettering

Pointer:

Aluminum, painted black

Case:

ABS, black

Movement:

Copper Alloy

Standard Scales:

PSI


***Specifications are subject to change without notice**



WARNING: Cancer and Reproductive Harm-
www.P65Warnings.ca.gov

SPRINKLER PRESSURE GAUGES

DIMENSIONS:

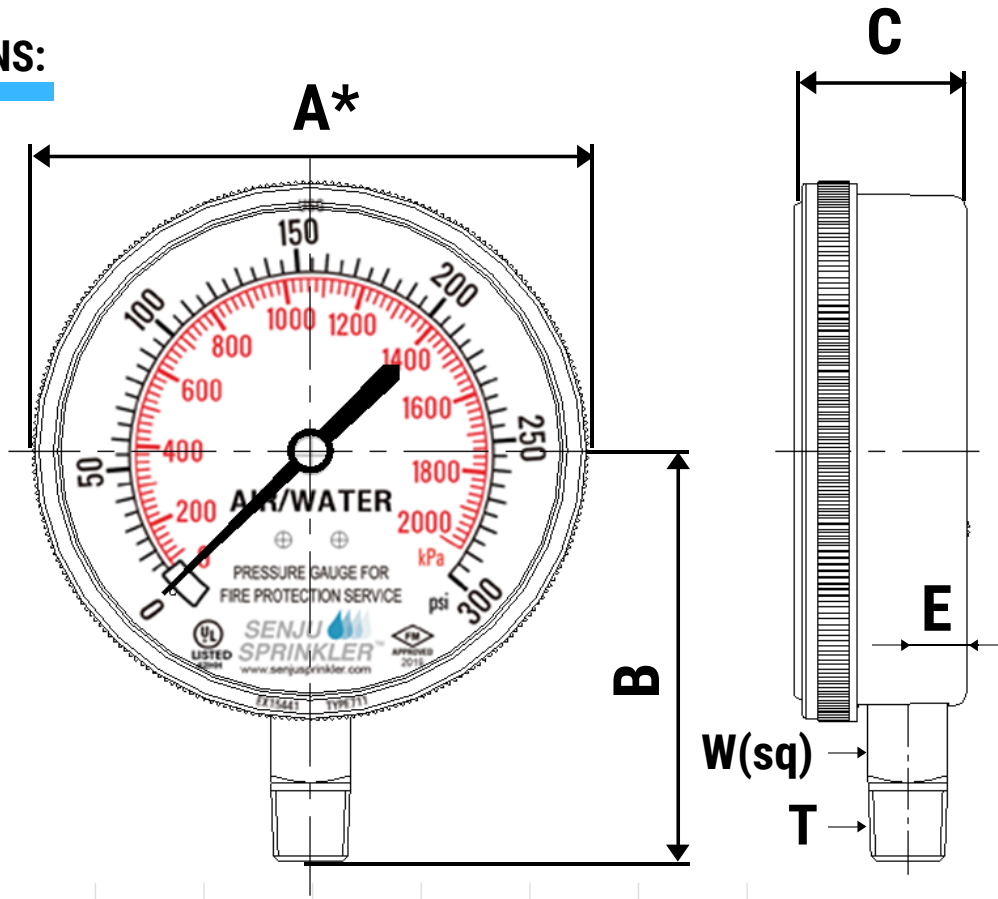

A*NOMINAL SIZE

SIZE	WEIGHT	KEY	A*	B	C	E	T	W
3-1/2"		mm	97.8	74.6	30.2	10.4		14.0
		in	3.850	2.937	1.188	.409		.551