



1/2" FIP or MIP x 3/4" MHT HOSE BIBB with Loose Key Handle


- No Kink Design
- Lead Free Brass
- NSF/ANSI/CAN 61 & 372 Certified
- Maximum Working Pressure 125 psi
- Temperature Rating Maximum 160°F
- Equipped with 1/2" FIP or MIP connection
- With Loose Key Handle
- Easy Installation




NSF/ANSI/CAN 61 & 372

MATERIAL

No.	Part	Material
1	Handle	Zinc (Z30A)
2	Packing Nut	Brass Rod (C37700)
3	Packing	PTFE (POLYFLON M-392)
4	Bonnet	Brass Rod (C46400)
5	Packing	Nylon
6	Stem	Brass Rod (C46400)
7	Seat Packing	Rubber (NBR SN-819F)
8	Screw	Forged Brass (C26000)
9	Body	Cast Brass (C46400 MOD)

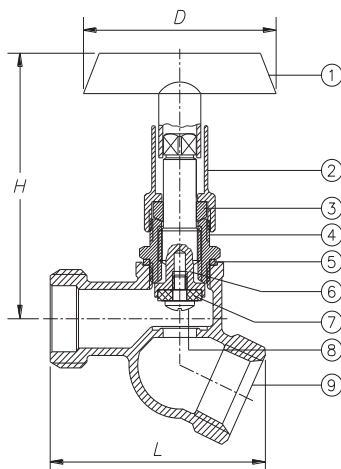

1/2" FIP

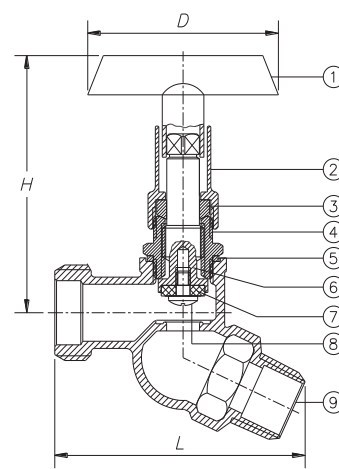

1/2" MIP

DIMENSIONS & WEIGHT

Nominal Size	Part Number	L mm (Inch)	D mm (Inch)	H mm (Inch)	Weight g (lbs.)
1/2" FIP x 3/4" MHT	90000-170-0001	62 (2.44)	55 (2.17)	64 (2.52)	204 (0.45)
1/2" MIP x 3/4" MHT	90000-170-0003	73 (2.87)	55 (2.17)	64 (2.52)	212 (0.47)
Spare Loose Key	90000-170-0002	55 (2.17)	10 (0.39)	4 (0.16)	17 (0.04)



WARNING: Cancer and Reproductive Harm
www.p65warnings.ca.gov

