

Senju Sprinkler

IN-LINE CHECK VALVE




- Lead Free Brass
- NSF/ANSI/CAN 61 & 372 Certified
- Threaded Ends
- Spring Loaded
- Horizontal or Vertical Installation
- NBR O-Ring
- Temperature Rating 180°F
- Pressure Rating 200 psi (Non Shock)



NSF/ANSI/CAN 61 & 372


MATERIAL

No.	Part	Material
1	Nut	Stainless Steel (304)
2	Spring Holder	Stainless Steel (304)
3	Spring	Stainless Steel (304)
4	Stem House	POM (M90 FORMOCON FM090 CF500P)
5	Body	Cast Bronze (C89844 MOD)
6	O Ring	Rubber (NBR SN-719F)
7	Stem	Cast Bronze (C89844 MOD)

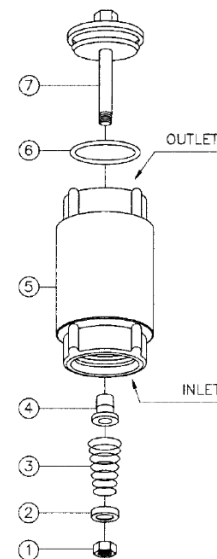


DIMENSIONS & WEIGHT

Size	Part Number	D mm (Inch)	H mm (Inch)	Weight g (lbs.)
1"	90000-160-0004	44.5 (1.75)	82 (3.23)	425 (0.94)
1-1/4"	90000-160-0005	55.5 (2.19)	92 (3.62)	625 (1.38)
1-1/2"	90000-160-0006	59 (2.32)	102.5 (4.04)	740 (1.63)
2"	90000-160-0007	77 (3.03)	128 (5.04)	1,430 (3.15)

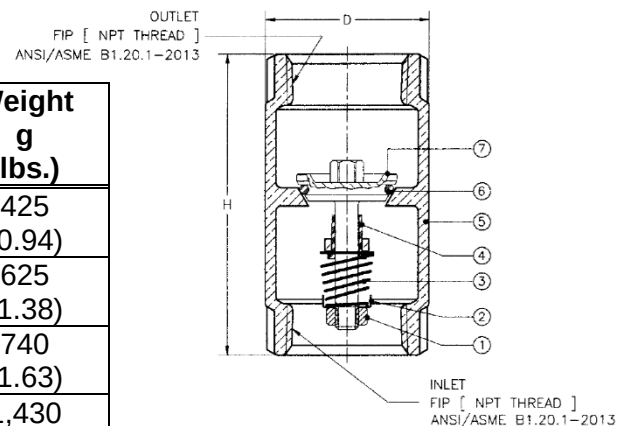

FLOW CHART

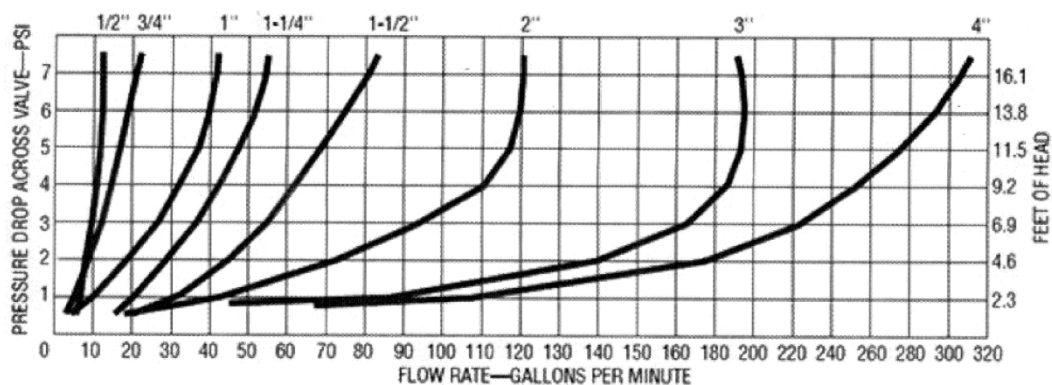

WARNING: Cancer and Reproductive Harm
www.p65warnings.ca.gov